


***MobileNation*: CELLULAR BROADBAND: Quick LAN and WLAN Connection Guide for BEC 6200WZL**

PACKAGE CONTENTS



- 9 BEC 6200WZL 4G/LTE Broadband Router
- 9 This Quick Installation Guide
- 9 CD containing User Manual
- 9 RJ-45 Ethernet Cable
- 9 Two 3G/4G-LTE detachable antennas
- 9 Power adaptor

REAR PANEL CONNECTORS

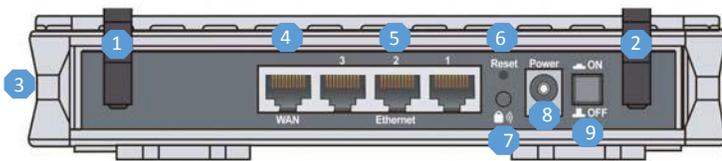

PORT	MEANING
1-2 LTE Antenna	Screw in the supplied antennas; Main antenna (1), must be connected (1); Auxiliary antenna (2)
3 SIM Card Slot	Insert the SIM card with the gold contact facing down. Listen for a “click” to indicate SIM card is locked in. Push the SIM card inwards to eject it.
4 WAN	Connect to Fiber/Cable/xDSL Modem with RJ-45 as an alternate internet source; this can also be used as a regular LAN port
5 Ethernet LAN (1~4)	Connect an Ethernet cable to one of four (including the WAN port) LAN ports when connecting a PC or a 100Mbps network
6 Reset	Reset button restores unit to Pine’s factory default configuration
7 Wireless On/Off	Press & hold the button for more that 6 seconds to On/Off the wireless LAN
8 Power Jack (DC)	Connect the supplied Power Adapter to this jack
9 Power Switch	Power ON/OFF switch

ANTENNA INSTALLATION

Grasp top of antenna with one hand and screw the base in with the other



DO NOT rotate the entire antenna around the unit during installation




Improper installation of the antenna can cause the connector to snap from the unit



ETHERNET LAN CONNECTION GUIDE

1. Power on the BEC 6200WZL router.
2. Connect the supplied RJ-45 Ethernet cable to one of the LAN ports and the other end of the cable to the PC’s Ethernet interface.
3. Provide a few seconds for connection to establish.
4. Verify that front panel Ethernet light(s) is on.

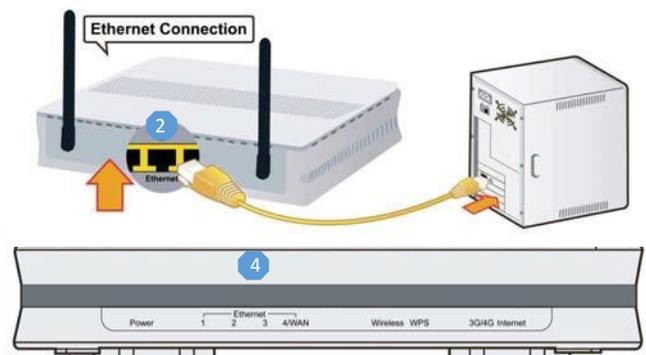

← See back page for Wireless LAN Connection Guide

MobileNation WIRELESS LAN SETUP GUIDE

Before starting the wireless LAN setup, verify the wireless key located on the bottom on the BEC 6200WZL router. Find it on a sticker labeled “Wi-Fi Key”. If this key is not available, contact Customer Support with the numbers provided on the router and request the wireless key.




Prepare the BEC 6200WZL Router for connection:

1. Power on the BEC 6200WZL router.
2. Ensure that the antennas are properly connected.
3. Verify that the router is online by checking the Internet light. Green light means the router is online.
If the light is orange, power off the router and remove the SIM card. Wait for about 5 seconds, insert the SIM card again, and power on the router. If the router remains offline, contact Customer Support for assistance.
4. Once you confirm that the router is online, you are ready to begin wireless network connection. Part of this procedure will vary depending on your operating system. Please refer to the options below.


Windows 8

1. Open the Charms bar by pressing Windows + C on your keyboard. Alternatively, if you have a mouse, move the cursor to the upper right corner of the screen until the Charms bar appears along the right edge of the screen. If you have a touch-enabled device, swipe from the right edge of the screen to bring up the Charms bar.
2. Click Settings.
3. Click on the Network icon.
4. Select the SSID
5. Ensure that “Connect automatically” is check marked. Click Connect.
6. Enter the Wi-Fi Key. (Hint: There are no letter O in the key. All letters are UPPERCASE.)
7. Click Next to establish connection.

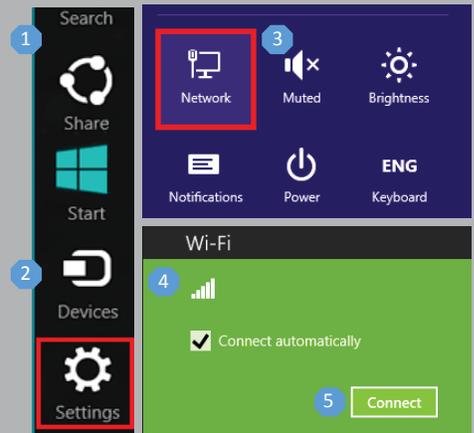

Windows 7 and Windows Vista

1. Open the Control Panel.
2. Locate the category Network and Internet or Network and Sharing Center.
3. On Network and Sharing Center, locate View your active networks and click Connect to a network. If the PC is connected to another network, click Connect or Disconnect.
4. The computer will search for all available SSID. Select the SSID. Ensure that “Connect automatically” is check marked. Click Connect.
5. Enter the Wi-Fi Key. (Hint: There are no letter O in the key. All letters are UPPERCASE.)
6. Click Ok to establish connection.

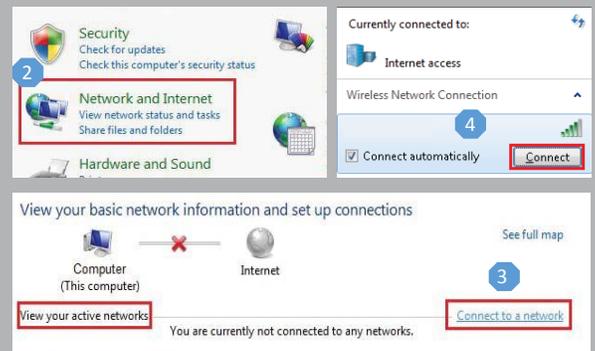

Macintosh OS X

1. Click the AirPort icon, located at the top right corner of your screen. In the drop-down menu that appears, make sure Wi-Fi is On.
2. Select the SSID. Ensure that “Remember this network” is check marked.
3. Enter the Wi-Fi Key. (Hint: There are no letter O in the key. All letters are UPPERCASE.)
4. Click Join to establish connection.

